definity™ COMPLETE

Technical Specification


CLICK® Scolmore GROUP

Product Code: SFBZ1536BK

Luckinslive 437083564

Description: 13A Ingot 2 Gang Double Pole Switched Safety Shutter Socket Outlet



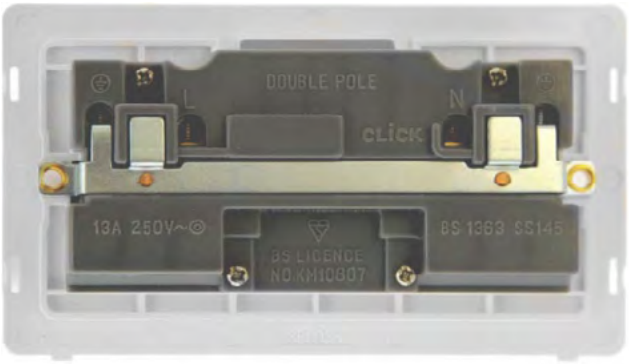

General Information

Dimensions (mm)	146 (W) x 86 (H) x 27 (D)		
Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	146 (W) x 86 (H) x 4 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Screwless Complete		
Finish	Matt Bronze		
Insert Colour	Black		
Compatible Cover Plate	SCP436#		
Materials	Cover Plate: Stainless Steel	Insert: Polycarbonate	
	Rear Housing: Urea	Switch Cover: Stainless Steel	
	Terminals: Brass	Terminal Screws: Steel & Yellow Passivated	
	Contacts: Silver "on-lay" Copper / Brass	Internal Busbars: Formed Pressed Brass	
	Earth Strap: Mild Steel		
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Termination Type	Screw		
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm)	2
Terminal Capacity - Solid (mm^2)	3 x 2.5 or 2 x 4		
Double Pole Switch	Yes		
3 Pin Safety Shuttered	Yes		
Twin Earth Terminals	Yes		
Minimum Back Box Depth (mm)	35		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards BS 1363-2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
The safety shutter will only fully open when all three BS 1363 plug-top pins engage correctly with the shutter. Inserting the earth pin alone will not open the live and neutral shutter like conventional socket shutters.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN