

Technical Data Sheet

CODE 11100

MG 100/4" LL

In-line axial fans




Certifications



Technical and performance data

Frequency (Hz)	50	Weight (Kg)	0,43
Insulation class	II°	Max airflow (l/s)	22,2
IP	X4	Max airflow (m³/h)	80
Max absorbed current (A)	0,10	Max pressure (mmH2O)	2,6
Max absorbed power (W)	18	Max pressure (Pa)	25
Max ambient temperature for continuous operation (°C)	40	RPM	2415
Voltage (V)	220-240	Sound pressure Lp [dB (A)] at 3 m	39

Dimensions

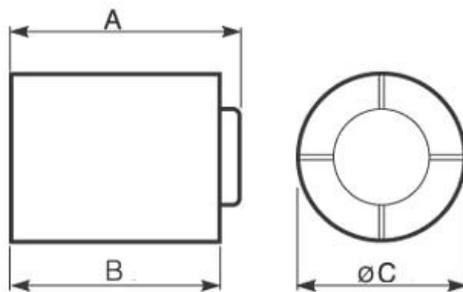

Size A (mm)	Ø 99
Size B (mm)	92
Size C (mm)	89

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11100

MG 100/4" LL


In-line axial fans



Description

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 80 m³/h.
- Vortice speed controllers.

Curves

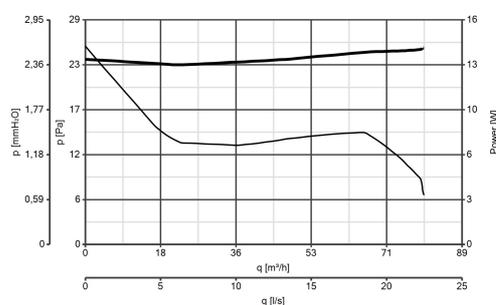

Accessories



STAFFA
SOTTOTETTO/SOFFITTO
D.90/100
Code 22259



C 1.5
COMANDO EL.
1.5 A)
Code 12966



SCNRB I
Code 12971
ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

PER INFORMAZIONI /
FOR INFORMATION

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com