

Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



Certifications



CE



CCC



EAC



G-Mark



UKCA




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50	Ø Discharge hole (mm)	99
Insulation class	II°	Voltage (V)	220-240
IP	X4	Weight (Kg)	0,6
Max absorbed current (A)	0,1	Max airflow (l/s)	25
Max absorbed power (W)	18	Max airflow (m³/h)	90
Max absorbed power at Max speed (W)	18	Max pressure (mmH2O)	3
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	29
Nominal diameter (mm)	100	RPM	2300
		Sound pressure Lp [dB (A)] at 3 m	37,5

Dimensions

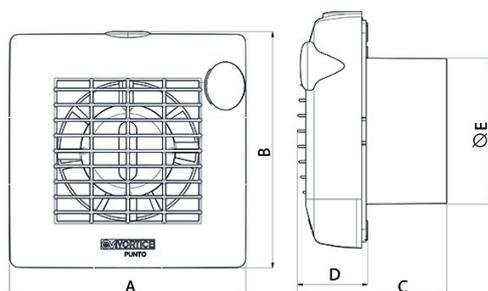

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



Description

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m³/h.
- Vortice speed controller.

Accessories



C 1.5
(COMANDO EL.
1.5 A)

Code 12966



SCNRB I
Code 12971



KIT SCB
(TRAS.F.E.C.)
Code 22481



S 100/4
Code 22154



F 100/4"
Code 22131



IRM 30
Code 12921

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com