

Technical Data Sheet

CODE 11211

M 100/4" T

Wall/window axial fans



Certifications



CE



CCC



EAC



G-Mark



UKCA




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	0,6
IP	X4	Max airflow (l/s)	25
Max absorbed current (A)	0,1	Max airflow (m ³ /h)	90
Max absorbed power (W)	18	Max pressure (mmH ₂ O)	3
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	29
Nominal diameter (mm)	100	RPM	2300
Ø Discharge hole (mm)	99	Sound pressure Lp [dB (A)] at 3 m	37,5

Dimensions

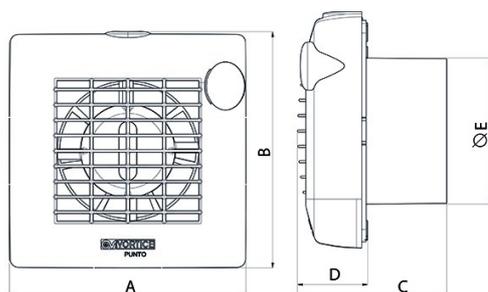

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 11211

M 100/4" T


Wall/window axial fans



Description

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').

Curves

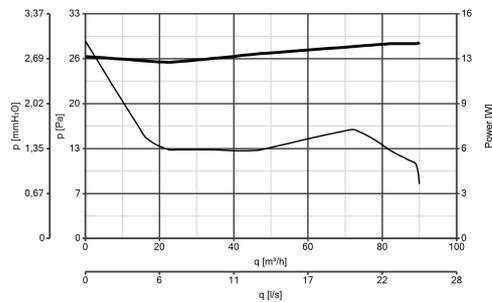

Accessories



S 100/4

Code 22154



F 100/4"

Code 22131

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com