

CERTIFICATION
OF THE QUALITY
SYSTEM OF THE
COMPANIES




UNI EN 29001
ISO 9001

Member of



The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

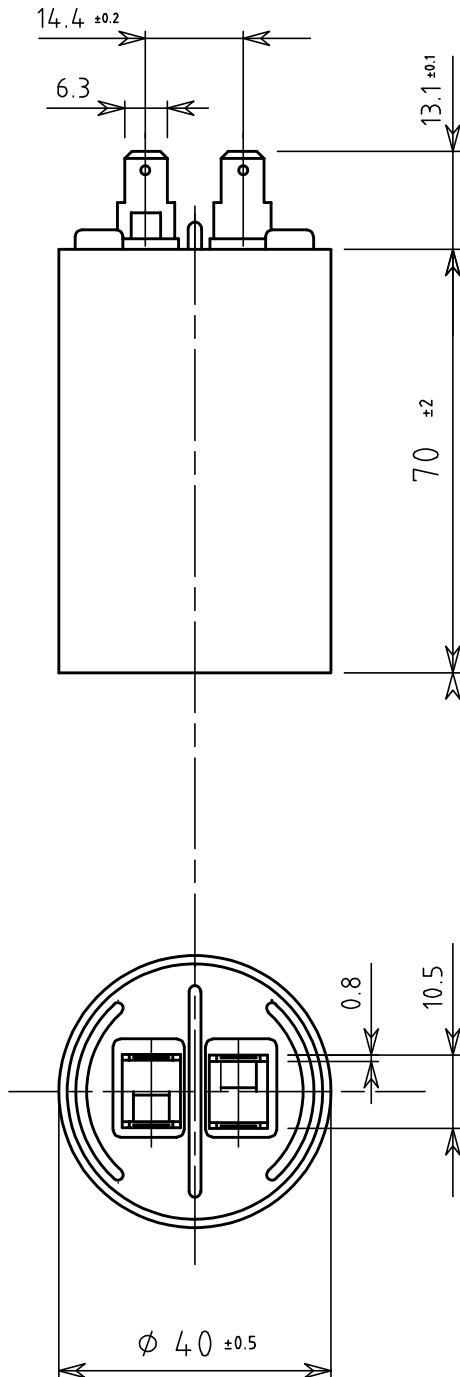

Characteristics:

Self healing metallized polypropylene film,
dry sealed with polyurethane resin.
Case and sealing cover in self-extinguishing
plastic material (V2 class according UL94 test).

Cover material properties:

Ball pressure test (IEC 60695-10-2): 125°C
Glow wire test (IEC 60695-2-11): 850°C
Tracking resistance (IEC 60112): >= 250V

DUCATI code: 416171660

Capacitance Tolerance: 16 µF±5%

Test voltage (routine test):

Between terminals: 1000Vac 2sec

Climatic category: -25/85/21

Safety class: S0

Protection degree: IP 00

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking layout:

416.17.16..

16 µF ±5%

425V~ 30000h/cl.A
475V~ 10000h/cl.B
500V~ 3000h/cl.C

-25/85/21 S0 \pm
50-60 Hz \pm

EN 60252-1/A1

Ed.	Descrizione/Description						Data/Date Firma/Sign.
MODIFICHE/REVISIONS							
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED
	OGGETTO/PART NAME	Dimensions for metallized polypropylene film capacitor for A.C. use.			28/05/26	Ciccola	
						CODICE/PART NR.	416171660
						EDIZ./EDIT.	