
essentials™

Technical Specification

Product Code: CLRCDP036 Luckinslive 433612861

Description: 13A 2 Gang Type A Passive RCD Switched Socket Outlet



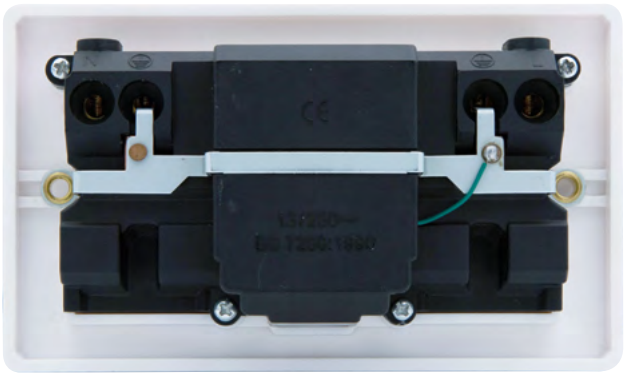

General Information

Dimensions (mm)	140 (W) x 80 (H) x 42 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Metal Clad		
Colour	Grey		
Insert Colour	White		
Supplied Fixing Screw Finish	Polished Chrome		
Materials	Front Plate & Back Box: Electrophoretically Coated Steel	Insert & Rocker Switch: Urea	
	Rear Housing: Urea	Terminals: Brass	
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass	
	Internal Busbars: Formed Pressed Brass	Earth Strap: Mild Steel	
	PCB: Mixed Components		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Breaking Capacity (A)	250 (Earth Leakage)		
Through Fault Withstand (A)	1500		
Trip Speed	Less than 300ms at 30mA (x1) Residual Current		
Termination Type	Screw		
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm)	2
Terminal Capacity - Solid (mm^2)	3 x 2.5 or 3 x 4		
Single Pole Switched	Yes		
Twin Earth Terminals	Yes		
Supplied Back Box Depth (mm)	40		
Back Box Knockouts - Total (mm)	7 x Ø20		
Back Box Knockouts - Top (mm)	3 x Ø20	Back Box Knockouts - Bottom (mm)	2 x Ø20
Back Box Knockouts - Rear (mm)	None	Back Box Knockouts - Sides (mm)	1 x Ø20
Back Box Earth Terminal Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20	Warranty - Electronics (Years)	2

Standards BS 1363-2, IEC 62640, BS 7288, SASO 2203, IEC 61000-6-1 & IEC 61000-6-3

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
The Cable must be routed through the most suitable entry point of the Back Box. When using the Metal Clad back box the top or bottom central knock out should not be used. If the central knock out is required then the CL088 50mm deep backbox may be used.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN