
# Technical Specification

Product Code: CMA606 Luckinslive 425338674

Description: New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Socket Outlets & Apertures

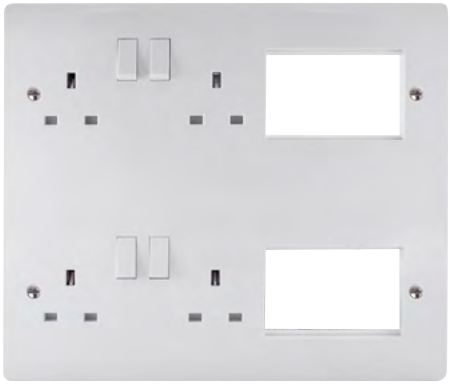

## General Information

| | | | |
|---|---|---|---|
| Plate Dimensions (mm) | 250 (W) x 216 (H) x 8 (D) | | |
| New Media Aperture Dimensions (mm) | 75 x 50 (x2) | | |
| New Media Module Quantity | Accepts Upto 2 Rows of 3 x 25mm x 50mm Modules | | |
| Style | Mode | | |
| Colour | Polar White | | |
| Materials | Front Plate & Rear Housing: Urea | Terminals: Brass | |
| | Terminal Screws: Steel & Yellow Passivated | Contacts: Silver "on-lay" Copper / Brass | |
| | Internal Busbars: Formed Pressed Brass | Earth Strap: Mild Steel | |
| Anti Microbial Certified | No | | |
| Operating Voltage (AC) | 250 | Frequency (Hz) | 50 |
| Resistive Load Rating (A) | 13 | | |
| Termination Type | Screw | | |
| Terminal Size (mm) | Ø5 | Terminal Torque Value (Nm) | 2.5 |
| Terminal Capacity - Solid ($mm^2$) | 3 x 2.5 or 2 x 4 | | |
| Double Pole Switch | Yes | | |
| Twin Earth Terminals | Yes | | |
| Compatible Back Box (mm) | MP535 (35) Or MP525 (47) | | |
| Ingress Protection | IP20 | | |
| Operational Temperature (°C) | -5 to +40 | | |
| Warranty (Years) | 25 | | |

**Standards** BS 1363-2

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Requires MP525 or MP535 flush back box.
Interchangeable with modules in the New Media Range.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN