
MODE®

Technical Specification

Product Code: CMAECP1

Luckinslive 434880896

Description: 1 Gang Supplementary Equipotential Bonding Connection Point Plate

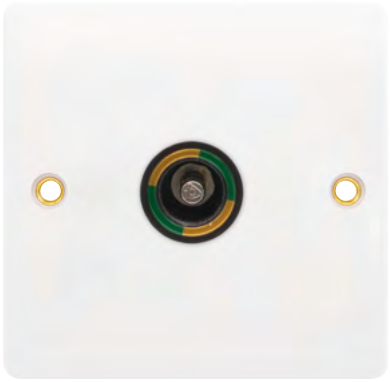

General Information

Plate Dimensions (mm)	86 (W) x 86 (H) x 9.5 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
Style	Rounded Profile	
Colour	Polar White	
Supplied Fixing Screw Finish	Polished Chrome	
Materials	Front Plate: Urea	Socket Housing: Polycarbonate
	Colour Ring: Anodized Aluminium	Nuts & Washers: Nickel Plated Brass
Anti Microbial Certified	Yes	
Incoming Terminal Diameter	M6 (x1)	
Termination Type	Threaded With Nuts & Washers	
Maximum Matings	>5000	
Contact Diameter (mm)	6	
-Vtest (Contact-Shell) (V)	2400	
Vtest (Contact-Shell) (V)	2000	
Product Marking	Green & Yellow	
Minimum Back Box Depth (mm)	35	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	25	

Standards Designed to meet IEC/BS EN 60601-1 Clause 8.6.7

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.
All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC CLICK OR SCAN