elucian


Technical Specification

Product Code: CU2MS100

Description: 2 Pole 100A Mains Isolator Switch

Luckinslive 425299933



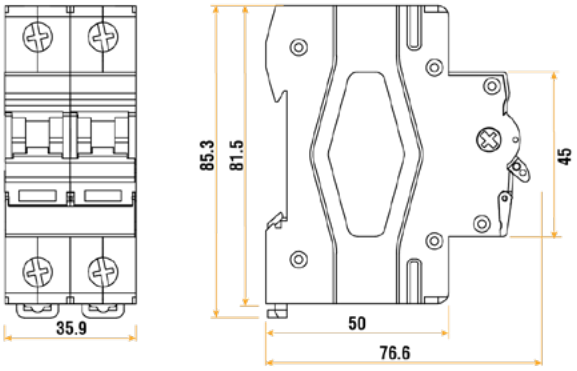

General Information

Dimensions (mm)	35.9 (W) x 85.3 (H) x 76.6 (D)
Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	230/415
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	100
Utilisation Category	AC-22A
Rated Short Circuit Withstand Current (Icw)	12 Ie, t=1s
Rated Short Circuit Making Capacity (Icm)	20 Ie
Rated Making & Breaking Capacity	3Ie,1.05Ue, COS Ø =0.65
Rated Insulation Voltage (V) (UI)	690
Impulse Withstand Voltage (Uimp)	6000
Endurance Mechanical Operations	10000
Endurance Electrical Operations	1500
Device Terminals	Screwed Lug & Pin
Main Switch Terminal Capacity (mm²)	35
Main Switch Terminal Torque (Nm)	2.5
Number Of Poles	2
Ingress Protection	IP20
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3

Standards BS EN 60947-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Website Range DoC CLICK OR SCAN