elucian


Technical Specification


Product Code: CU4RCD40HP

Luckinslive 438887206

Description: 4 Pole 40A 30mA (Type B) RCCB - Bi-directional - Heat Pumps



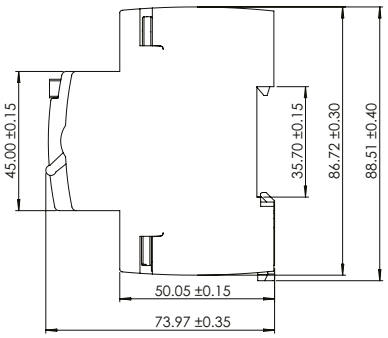



General Information

Dimensions (mm)	71 (W) x 88.5 (H) x 74 (D)
Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	400/415
Frequency (Hz)	50
Maximum Rated Current (A) (In)	40
Impulse Withstand Voltage (Uimp)	4000
Endurance Mechanical Operations	4000
Endurance Electrical Operations	2000
Type	B
Rated Making & Breaking Capacity (A) (Im)	500
Tripping Current (mA) (In)	30
Tripping Frequency (kHz)	<20
High-Frequency Tripping Threshold	150mA (Optimized to prevent nuisance tripping on frequencies above 1 kHz)
Residual Non-Operating Current (IΔn)	0.5
Bi-directional	Yes
Device Terminals	Screwed Lug & Pin
RCD Terminal Capacity (mm²)	35
RCD Terminal Torque (Nm)	2.5
Number Of Poles	4 (3+N)
Ingress Protection	IP20
Maximum Humidity (%)	95
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3
Standards	IEC 62423, EN 62423, IEC 61008-1, EN 61008-1
Additional Information	For cleaning / polishing of products, use only a soft, dry, clean cloth.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Website Range DoC CLICK OR SCAN