elucian


Technical Specification

Product Code: CUEB10

Description: 10 Way Unpopulated Metal Consumer Unit

Luckinslive 435925873



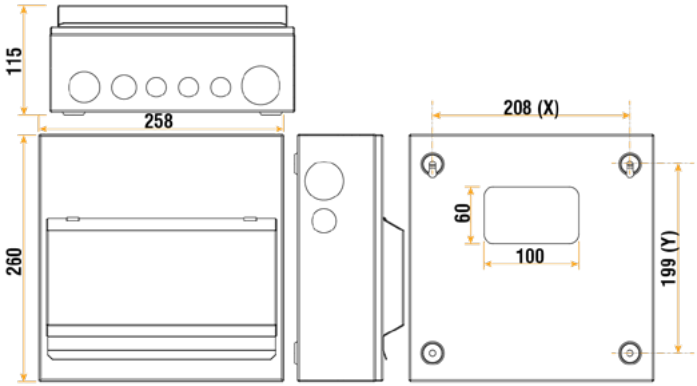

General Information

Dimensions With Door (mm)	258 (W) x 260 (H) x 115 (D)		
Enclosure Dimensions (mm)	222 (W) x 260 (H) x 92 (D)		
Colour	White		
Materials	Enclosure & Cover: Powder Coated Steel	DIN Rail: Galvanised Steel	
Rated Operational Voltage (AC) (Ue)	230		
Frequency (Hz)	50/60		
Maximum Rated Current (A) (In)	100		
Free Ways	10		
Total Ways	10		
Blanks Supplied	2 (Product Code: CU1BLANK)		
E&N Terminals	Screw		
E&N Bars Capacity (mm²)	16	E&N Bars Torque (Nm)	2
Tail Clamp Capacity (mm²)	25	Tail Clamp Torque (Nm)	1.5
Enclosure Side Knockouts (Ømm)	1 x 25 & 1 x 40		
Enclosure Top Knockouts (Ømm)	4 x 20, 1 x 32 & 1 x 40		
Enclosure Bottom Knockouts (Ømm)	4 x 20, 1 x 32 & 1 x 40		
Enclosure Rear Knockouts (mm)	100 x 60		
Impact Rating	IK05		
Ingress Protection	IP20		
Maximum Humidity (%)	95		
Storage Temperature (°C)	-40 to +75		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10		

Standards BS EN 61439-3

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations.
If installing a main switch or RCD, the neutral cable CUCNL285 will be required.
Complete complement of earth and neutral terminals along with marking labels, busbar, mains cable clamp, blanks, 40mm meter tail gland, premium black grommet strip and instruction leaflet.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Website Range DoC Installation CLICK OR SCAN