GRIDPRO®


# Technical Specification

CLICK® Scolmore GROUP

Product Code: FPPN20402

Description: 2 Gang GridPro® Frontplate

Luckinslive 404473709

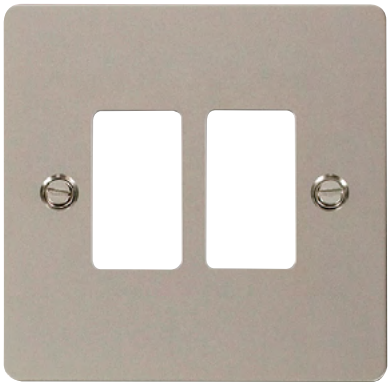

## General Information

| | | |
|---|---|---|
| Range | define® | |
| Plate Dimensions (mm) | 86 (W) x 86 (H) x 1.3 (D) | |
| Dimensions With Gasket (mm) | 86 (W) x 86 (H) x 3 (D) | |
| Plate Fixing Centres - Horizontal (mm) | 60.3 | |
| Style | Define | |
| Finish | Pearl Nickel | |
| Gasket Colour | Transparent (Neoprene) | |
| Supplied Fixing Screw Finish | Polished Chrome | |
| Materials | Front Plate: Stainless Steel<br>Fixing Lugs: Brass | Insert: Urea |
| Anti Microbial Certified | No | |
| Yoke Required | No | |
| Minimum Back Box Depth (mm) | 35 | |
| Ingress Protection | IP20 | |
| Operational Temperature (°C) | -5 to +40 | |
| Warranty (Years) | 20 | |

**Standards** BS 5733

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
No yoke required.

STANDARD BACK BOX | NO YOKE | SCREW-IN MODULES

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN