
define®

Technical Specification

CLICK® Scolmore GROUP

Product Code: FPSS426BK Luckinslive 389093110

Description: 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

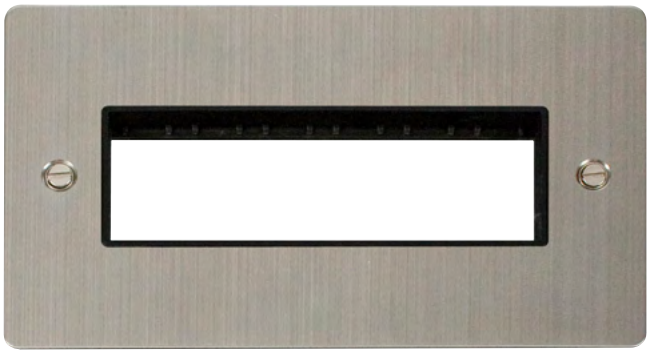



General Information

Plate Dimensions (mm)	146 (W) x 86 (H) x 1.3 (D)
Dimensions With Gasket (mm)	146 (W) x 86 (H) x 3 (D)
Plate Fixing Centres - Horizontal (mm)	120.6
MiniGrid Plate (Gang)	2
MiniGrid Single Width Module Quantity	6
MiniGrid Double Width Module Quantity	3
Style	Flat Plate
Finish	Stainless Steel
Insert Colour	Black
Gasket Colour	Transparent (Neoprene)
Supplied Fixing Screw Finish	Polished Chrome
Materials	Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Insert: Urea Terminal Screws: Steel & Yellow Passivated
Anti Microbial Certified	No
Termination Type	Screw
Modular Rocker Switches	Yes
Minimum Back Box Depth (mm)	Dependent On Modules Fitted
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	20

Standards BS 5733

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range. MINIGRID®

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN