

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** www.electricalwholesaler.ie

**Supplier's address:** Sales, Plantation rd, H18 E781 Monaghan Ulster, IE

**Model identifier:** GMYGU105A01E303

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	360 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	5,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	53	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,410
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	367	Beam angle in degrees, or the range of beam angles that can be set	36
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,99	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,9

(a) '-': not applicable;

(b) '-': not applicable;

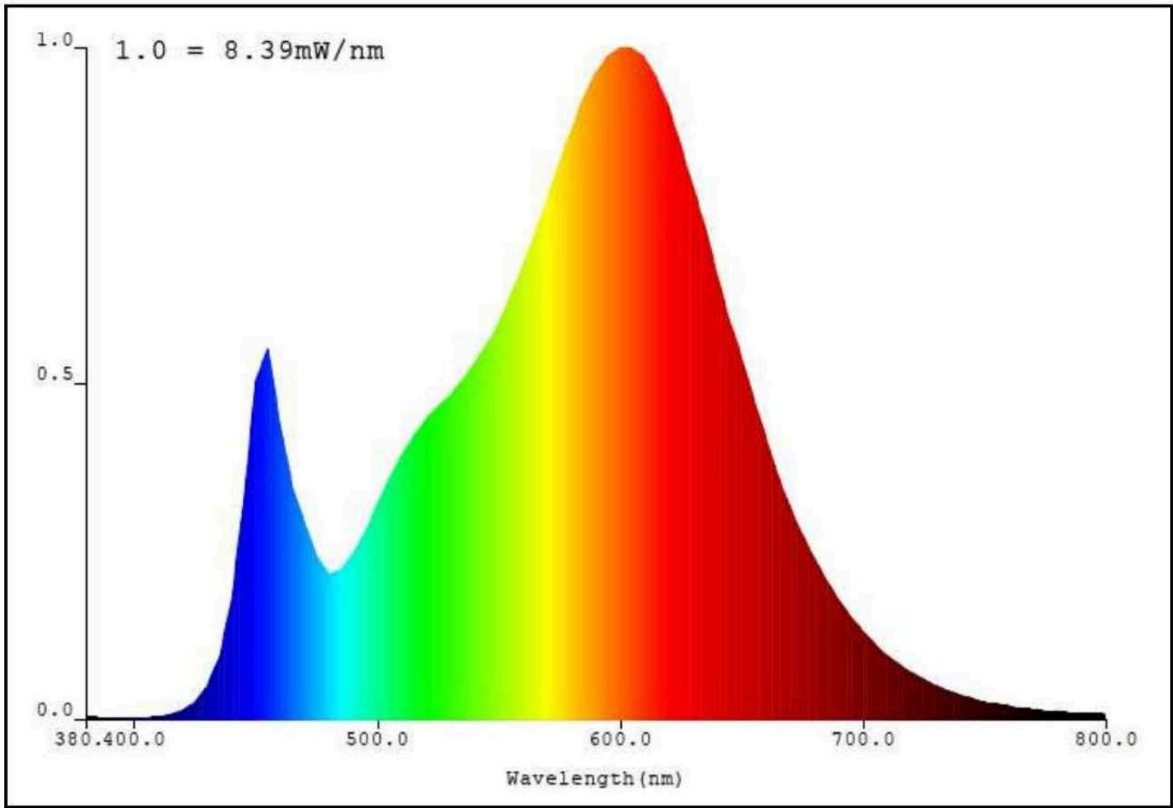

**GMY-GU10-5D-A01-E-30**

**EPREL registration number:** 916091

Model placed on the Union market from 01/08/2019.



<https://eprel.ec.europa.eu/qr/916091>

**Supplier:** Monaghan Electrical Wholesale Ltd (Manufacturer)

**Website:** <https://www.electricalwholesaler.ie>

**Customer care service:**

**Name:** Sales

**Website:** [www.electricalwholesaler.ie](http://www.electricalwholesaler.ie)

**Email:** [sales@electricalwholesaler.ie](mailto:sales@electricalwholesaler.ie)

**Phone:** +3534781135

**Address:**

Plantation rd  
H18 E781 Monaghan  
Ireland