
essentials™

Technical Specification

Product Code: PA380RD

Luckinslive 389783844

Description: 13A Resilient Non-Standard Plug Top (13A Fused) Bar Grip

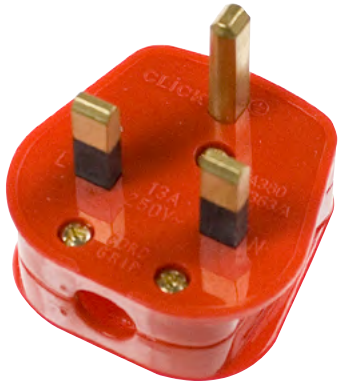

General Information

Dimensions (mm)	49.5 (W) x 21 (D) x 49.5 (H)		
Colour	Red		
Materials	Body: Nylon	Pins: Brass	
	Internal Busbars: Formed Pressed Brass	Fuse: BS 1362 Approved	
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Fuse Fitted Type	Plug Top Cartridge Fuse		
Termination Type	Screw		
Terminal Size (mm)	Ø3.1	Terminal Torque Value (Nm)	0.4
Terminal Capacity - Solid (mm^2)	1.5		
Product Marking	Fused		
Cable Entry Dimensions (mm)	Ø10.8		
Cable Restraint Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10		

Standards BS 1363/A, BS 1362

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Always refer to the circuit diagram supplied with the relevant product.
The non-standard plugs are suitable for use only with the non-standard sockets, product codes CMA935 and CMA936.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC CLICK OR SCAN