
Q-CRIMP

Technical Specification

UNICRIMP A Scolmore GROUP Company

Product Code: QWEBF8 **Luckinslive** 438961575

Description: Heavy Duty Extra Plasterboard Bullfix Fixing (PK8)

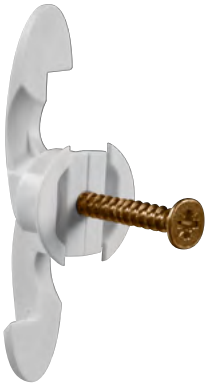

Dimensions

Thread Length (mm)	35
Drill Size (mm)	20
Plasterboard Thickness (mm)	12.5-15

General Information

Head Type	Pozi Countersunk
Minimum Cavity Required (mm)	20
12.5mm Plasterboard - Maximum Shear Load (Kg)	98
12.5mm Plasterboard - Maximum Tension Load (Kg)	46
12.5mm Plasterboard - Maximum Cantilever Load @ 150mm (Kg)	39
15mm Plasterboard - Maximum Shear Load (Kg)	133
15mm Plasterboard - Maximum Tension Load (Kg)	60
15mm Plasterboard - Maximum Cantilever Load @ 150mm (Kg)	45

Materials

Collar & Fixing: Glass Filled Nylon
Screw: Mild Steel Zinc Plated

Compatible Accessories

Screw Gauge No. 10 or 5mm Diameter

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300600 | **F:** +44 (0)1827 300620
E: sales@unicrimp.com | **W:** unicrimp.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN