definity™ COMPLETE

Technical Specification


Product Code: SFAB065BK

Description: Single Non-Isolated Coaxial Outlet

Luckinslive 435690593

CLICK® Scolmore GROUP



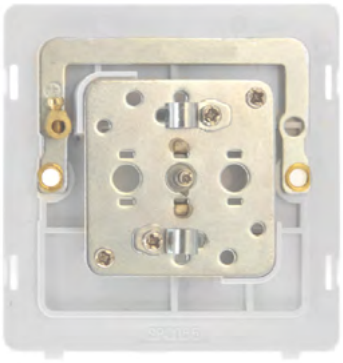

General Information

Dimensions (mm)	86 (W) x 86 (H) x 23 (D)
Insert Dimensions (mm)	82.5 (W) x 82.5 (H) x 2.5 (D)
Plate Dimensions (mm)	86 (W) x 86 (H) x 4 (D)
Plate Fixing Centres - Horizontal (mm)	60.3
Style	Screwless Complete
Finish	Antique Brass
Insert Colour	Black
Compatible Cover Plate	SCP231#
Materials	Cover Plate: Stainless Steel Earth Plate: Mild Steel Insert: Polycarbonate Terminals: Brass
Anti Microbial Certified	No
Termination Type	Screw
Isolated	No
Non-Isolated	Yes
Non-Isolated Comments	Enables 2 way signal transmission
Minimum Back Box Depth (mm)	25
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	20

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.
CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms.
PTC resettable fuses increase resistance as temperature increases due to increased flow. PTC resettable fuses are designed to limit unsafe currents while allowing constant safe current levels, resistance will "reset" automatically when the fault is removed and temperature returns to a safe level.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

UK Design Registration: 3015621

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN