definity™ COMPLETE

Technical Specification


CLICK® Scolmore GROUP

Product Code: SFBK019BK

Luckinslive 435278643

Description: 10AX 4 Gang 2 Way Plate Switch



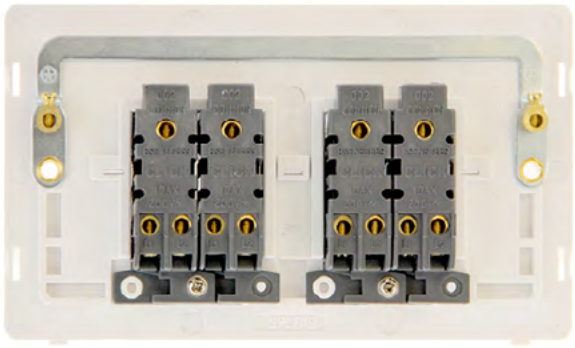

General Information

Dimensions (mm)	146 (W) x 86 (H) x 25 (D)		
Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	146 (W) x 86 (H) x 4 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
MiniGrid Plate (Gang)	2		
MiniGrid Single Width Module Quantity	2 x 2		
MiniGrid Double Width Module Quantity	2		
Style	Screwless Complete		
Finish	Matt Black		
Insert Colour	Black		
Compatible Cover Plate	SCP404#		
Materials	Cover Plate: Polycarbonate	Insert: Polycarbonate	
	Rear Housing: Nylon	Terminals: Brass	
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass	
	Internal Busbars: Formed Pressed Brass	Earth Strap: Mild Steel	
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Inductive Load Rating (AX)	10		
Load Rating Comments	Suitable for Fluorescent or Inductive Loads		
Termination Type	Screw		
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm^2)	4 x 1.5 or 2 x 2.5		
2 Way Switch	Yes		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
The MiniGrid modules installed are moulded black (BK) finish.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
Interchangeable with moulded black (BK) modules in the MiniGrid Range. MINIGRID®

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN