definity™ COMPLETE

# Technical Specification


CLICK® Scolmore GROUP

Product Code: SFCH412PW

Luckinslive 435277314

Description: 10AX Ingot 2 Gang 2 Way Plate Switch



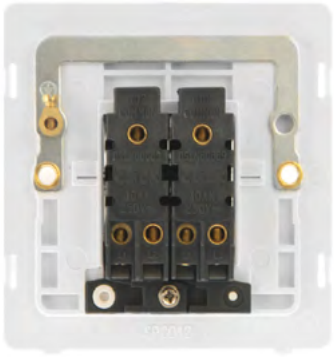

## General Information

| | |
|---|---|
| Dimensions (mm) | 86 (W) x 86 (H) x 25 (D) |
| Insert Dimensions (mm) | 82.5 (W) x 82.5 (H) x 2.5 (D) |
| Plate Dimensions (mm) | 86 (W) x 86 (H) x 4 (D) |
| Plate Fixing Centres - Horizontal (mm) | 60.3 |
| MiniGrid Plate (Gang) | 1 |
| MiniGrid Single Width Module Quantity | 2 |
| MiniGrid Double Width Module Quantity | 1 |
| Style | Screwless Complete |
| Finish | Polished Chrome |
| Insert Colour | Polar White |
| Compatible Cover Plate | SCP402# |
| Materials | Cover Plate: Stainless Steel<br>Switch Cover: Stainless Steel<br>Terminals: Brass<br>Contacts: Silver "on-lay" Copper / Brass<br>Earth Strap: Mild Steel<br>Insert: Polycarbonate<br>Rear Housing: Nylon<br>Terminal Screws: Steel & Yellow Passivated<br>Internal Busbars: Formed Pressed Brass |
| Anti Microbial Certified | No |
| Operating Voltage (AC) | 250 |
| Frequency (Hz) | 50 |
| Inductive Load Rating (AX) | 10 |
| Load Rating Comments | Suitable for Fluorescent or Inductive Loads |
| Termination Type | Screw |
| Terminal Size (mm) | Ø3.5 |
| Terminal Torque Value (Nm) | 0.5 |
| Terminal Capacity - Solid ($mm^2$) | 4 x 1.5 or 2 x 2.5 |
| 2 Way Switch | Yes |
| Minimum Back Box Depth (mm) | 25 |
| Ingress Protection | IP20 |
| Operational Temperature (°C) | -5 to +40 |
| Warranty (Years) | 20 |

**Standards** BS EN 60669-1

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range. MINIGRID®

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN