
Technical Specification

Product Code: MP603SCBK

Luckinslive 408146744

Description: New Media™ Part Furnished Front Plate - 2 x 13A DP Switched Socket Outlets & 3 Apertures



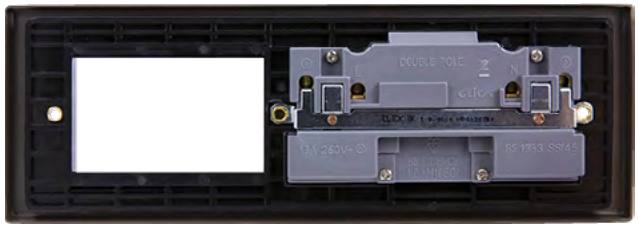

General Information

Plate Dimensions (mm)	250 (W) x 86 (H) x 8 (D)
Dimensions With Gasket (mm)	254 (W) x 90 (H) x 9 (D)
New Media Aperture Dimensions (mm)	75 x 50
New Media Module Quantity	Accepts Upto 3 x 25mm x 50mm Modules
Style	Deco
Finish	Satin Chrome
Insert Colour	Black
Gasket Colour	Black
Supplied Fixing Screw Finish	Polished Chrome
Materials	Front Plate: Stainless Steel
	Insert, Rear Housing & Rocker Switch: Urea
	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated
	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass
	Earth Strap: Mild Steel
Anti Microbial Certified	No
Operating Voltage (AC)	250
Frequency (Hz)	50
Resistive Load Rating (A)	13
Termination Type	Screw
Terminal Size (mm)	Ø5
Terminal Torque Value (Nm)	2.5
Terminal Capacity - Solid (mm^2)	3 x 2.5 or 2 x 4
Double Pole Switch	Yes
Twin Earth Terminals	Yes
Yoke Required	No
Compatible Back Box (mm)	MP520 (47)
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	20

Standards BS 1363-2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Requires MP520 flush back box.
Interchangeable with modules in the New Media Range.

UK Design Registration: 3015621

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN