
MODE®

Technical Specification

Product Code: CMA632BL

Luckinslive 425139682

Description: 13A 2 Gang Unswitched Socket Outlet - Blue (Medical Equipment Only)

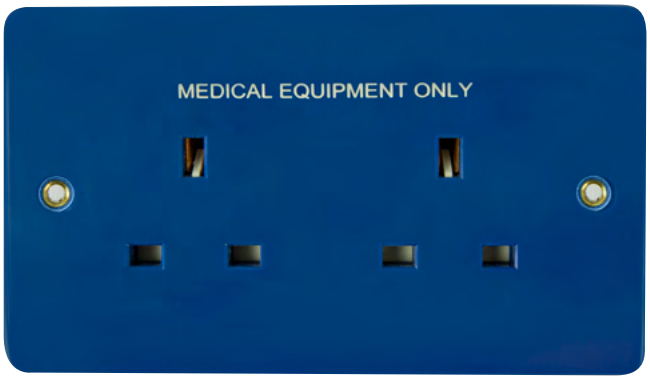



General Information

Plate Dimensions (mm)	146 (W) x 86 (H) x 9.5 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Rounded Profile		
Colour	Blue		
Supplied Fixing Screw Finish	Polished Chrome		
Materials	Front Plate & Rocker Switch: Urea	Rear Housing: Urea	
	Terminals: Brass	Terminal Screws: Steel & Yellow Passivated	
	Contacts: Silver "on-lay" Copper / Brass	Internal Busbars: Formed Pressed Brass	
	Earth Strap: Mild Steel		
Anti Microbial Certified	Yes		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Termination Type	Screw		
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm)	2
Terminal Capacity - Solid (mm^2)	3 x 2.5 or 2 x 4		
Switched	No		
Twin Earth Terminals	Yes		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	25		

Standards BS 1363-2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN