
Technical Specification

Product Code: DPSC520GY

Luckinslive 422428095

Description: 10A Ingot 3 Pole Fan Isolation Plate Switch



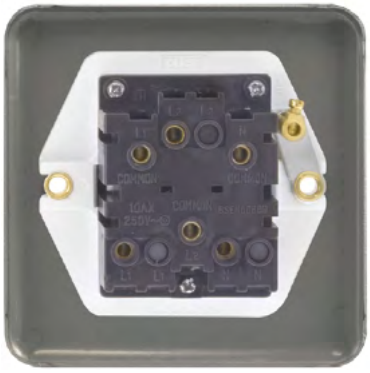

General Information

Dimensions (mm)	91 (W) x 91 (H) x 23 (D)
Plate Dimensions (mm)	88 (W) x 88 (H) x 8 (D)
Dimensions With Gasket (mm)	91 (W) x 91 (H) x 9 (D)
Plate Fixing Centres - Horizontal (mm)	60.3
Style	Rounded Profile
Finish	Satin Chrome
Insert Colour	Grey
Gasket Colour	Grey
Supplied Fixing Screw Finish	Polished Chrome
Materials	Front Plate: Stainless Steel
	Switch Cover: Stainless Steel
	Terminal Screws: Steel & Yellow Passivated
	Internal Busbars: Formed Pressed Brass
	Insert: Urea
	Terminals: Brass
	Contacts: Silver "on-lay" Copper / Brass
	Earth Strap: Mild Steel
Anti Microbial Certified	No
Operating Voltage (AC)	250
Frequency (Hz)	50
Resistive Load Rating (A)	10
Termination Type	Screw
Terminal Size (mm)	Ø3.5
Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm^2)	4 x 1.5 or 2 x 2.5
Modular Rocker Switches	No
Triple Pole Switch	Yes
Product Marking	Isolator, On, Off'
Minimum Back Box Depth (mm)	16
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	20

Standards BS EN 60669-2-4, BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

UK Design Registration: 3015621

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN