
# Technical Specification

Product Code: DPSS401BK

Luckinslive 404218126

Description: 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture



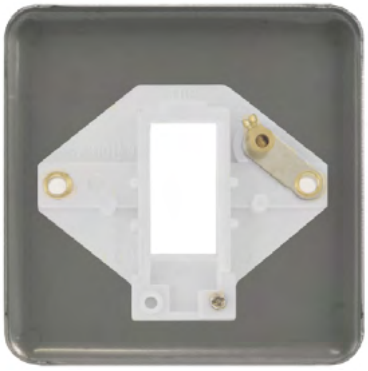

## General Information

| | |
|---|---|
| Plate Dimensions (mm) | 88 (W) x 88 (H) x 8 (D) |
| Dimensions With Gasket (mm) | 91 (W) x 91 (H) x 9 (D) |
| Plate Fixing Centres - Horizontal (mm) | 60.3 |
| MiniGrid Plate (Gang) | 1 |
| MiniGrid Single Width Module Quantity | 1 |
| MiniGrid Double Width Module Quantity | 0 |
| Style | Rounded Profile |
| Finish | Stainless Steel |
| Insert Colour | Black |
| Gasket Colour | Black |
| Supplied Fixing Screw Finish | Polished Chrome |
| Materials | Front Plate: Stainless Steel<br>Terminals: Brass<br>Earth Strap: Mild Steel<br>Insert: Urea<br>Terminal Screws: Steel & Yellow Passivated |
| Anti Microbial Certified | No |
| Termination Type | Screw |
| Modular Rocker Switches | Yes |
| Minimum Back Box Depth (mm) | Dependent On Module Fitted |
| Ingress Protection | IP20 |
| Operational Temperature (°C) | -5 to +40 |
| Warranty (Years) | 20 |

**Standards** BS 5733

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range. MINIGRID®

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN