definity™ COMPLETE

# Technical Specification


CLICK® Scolmore GROUP

Product Code: SFPW623PW

Luckinslive 435275853

Description: 20A Double Pole Plate Switch With Neon



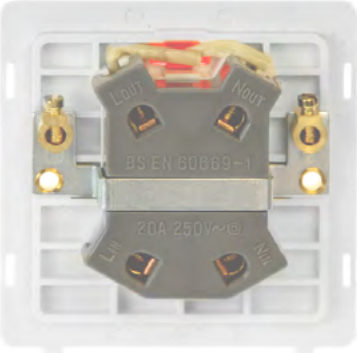


## General Information

| | |
|---|---|
| Dimensions (mm) | 86 (W) x 86 (H) x 26 (D) |
| Insert Dimensions (mm) | 82.5 (W) x 82.5 (H) x 2.5 (D) |
| Plate Dimensions (mm) | 86 (W) x 86 (H) x 4 (D) |
| Plate Fixing Centres - Horizontal (mm) | 60.3 |
| Style | Screwless Complete |
| Colour | Polar White |
| Insert Colour | Polar White |
| Compatible Cover Plate | SCP423# |
| Materials | Cover Plate: Polycarbonate<br>Rear Housing: Urea<br>Terminals: Brass<br>Contacts: Silver "on-lay" Copper / Brass<br>Earth Strap: Mild Steel |
| | Insert: Polycarbonate<br>Neon Lens: Polycarbonate<br>Terminal Screws: Steel & Yellow Passivated<br>Internal Busbars: Formed Pressed Brass |
| Anti Microbial Certified | No |
| Operating Voltage (AC) | 250 |
| Frequency (Hz) | 50 |
| Resistive Load Rating (A) | 20 |
| Termination Type | Screw |
| Terminal Size (mm) | Ø5 |
| Terminal Torque Value (Nm) | 1.8 |
| Terminal Capacity - Solid ($mm^2$) | 3 x 2.5 |
| Double Pole Switch | Yes |
| Twin Earth Terminals | Yes |
| Neon Indicator | Yes |
| Indicator Colour | Red |
| Minimum Back Box Depth (mm) | 35 |
| Ingress Protection | IP20 |
| Operational Temperature (°C) | -5 to +40 |
| Warranty (Years) | 20 |

**Standards** BS EN 60669-1

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN